


6	5	4	3	2	1					
CLAMPSTAR CATALOG NUMBER (SEE NOTE 1)	CONDUCTOR DIA. RANGE	MAXIMUM CONDUCTOR DIAMETER	MAXIMUM ACSR	MAXIMUM AAC	FASTENERS PER SIDE	NUT WRENCH REQUIRED	AVERAGE WEIGHT	END HEAD LENGTH	NOMINAL LENGTH	CLEARANCE LENGTH
CSR-1631-048	1.345-1.631 (34.1-41.4 mm)	1.631 (41.4 mm)	CHUKAR 84/19 (1780 kcmil)	COWSLIP (2000 kcmil, 91 Strand)	20	3/4 or T60	36.0 (16.4 kg)	27.0 (686 mm)	102 (2591 mm)	48 (1220 mm)
CSR-1631-060	1.345-1.631 (34.1-41.4 mm)	1.631 (41.4 mm)	CHUKAR 84/19 (1780 kcmil)	COWSLIP (2000 kcmil, 91 Strand)	20	3/4 or T60	37.9 (17.2 kg)	27.0 (686 mm)	114 (2896 mm)	60 (1524 mm)
CSR-1631-192	1.345-1.631 (34.1-41.4 mm)	1.631 (41.4 mm)	CHUKAR 84/19 (1780 kcmil)	COWSLIP (2000 kcmil, 91 Strand)	20	3/4 or T60	58.2 (26.4 kg)	27.0 (686 mm)	246 (6249 mm)	192 (4877 mm)

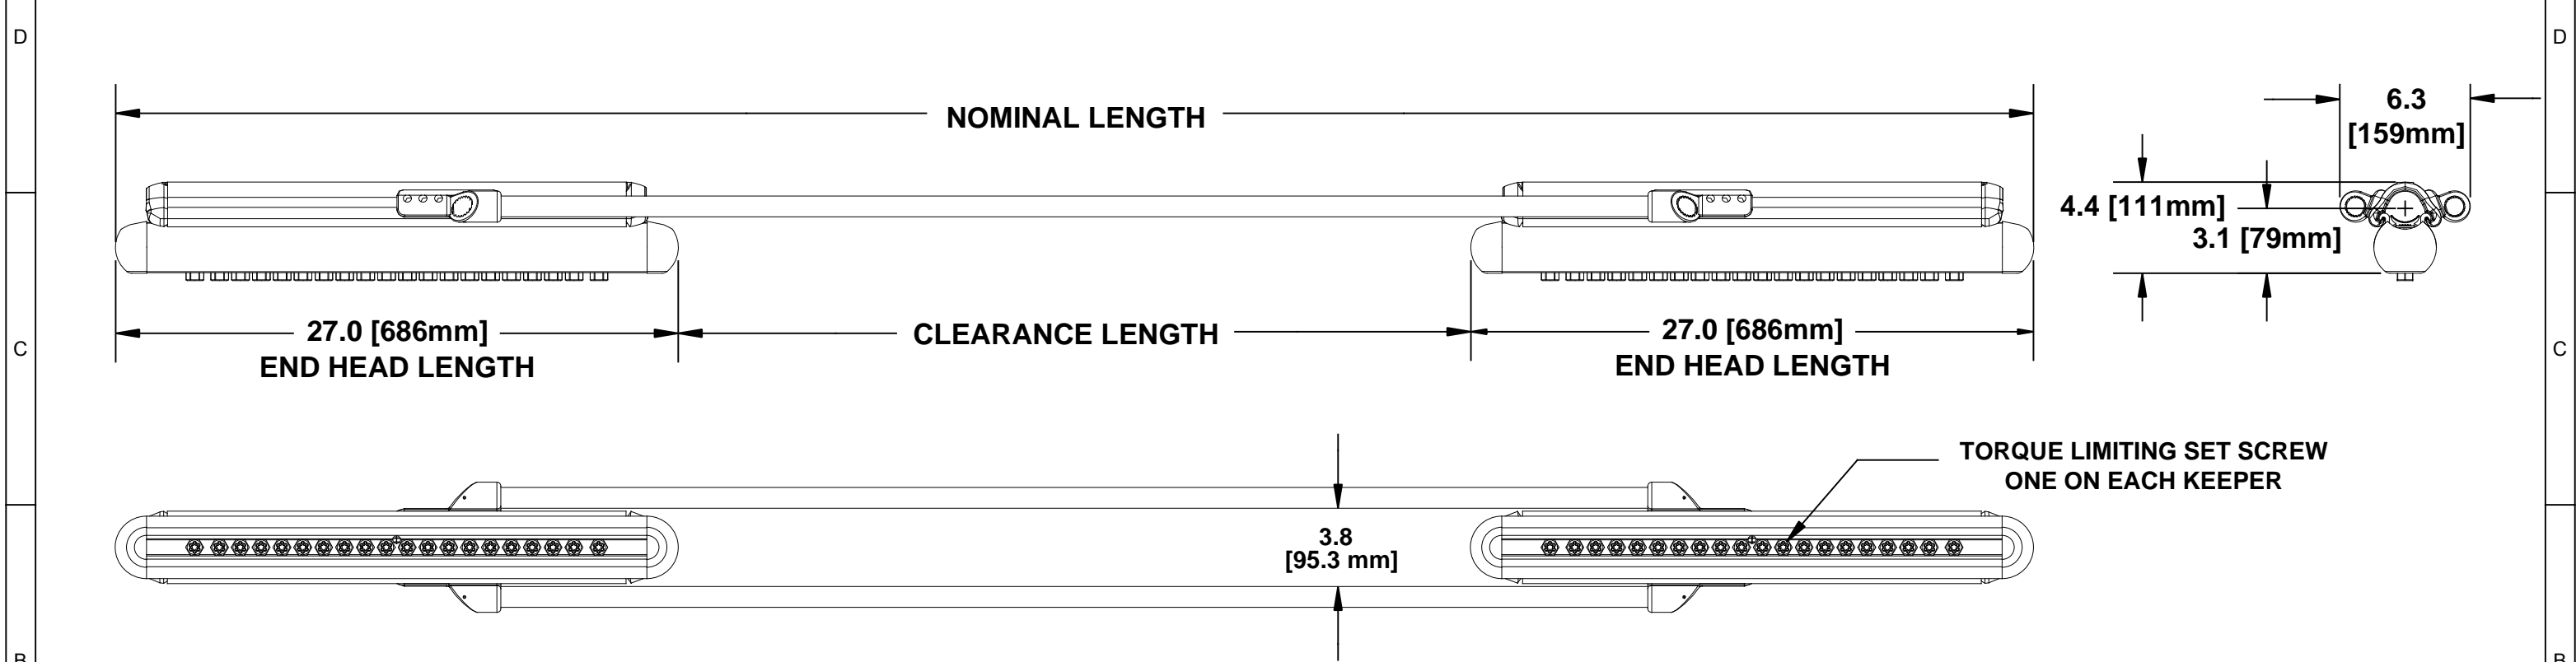

- NOTES:**
- LAST THREE DIGITS IN PART NUMBER DESIGNATE "CLEARANCE LENGTH" INSIDE FRAME. CUSTOMER MAY REQUEST DIFFERENT CLEARANCE, CONSULT FACTORY.
 - WEIGHT VARIES WITH "CLEARANCE LENGTH" +/- 0.154 lbs. (0.07kg.) PER INCH OF CHANGE.
 - TORQUE LIMITING SET SCREWS: 3/4-16
 - WRENCH SIZE TO INSTALL: 3/4" or T60 BIT
 - WRENCH SIZE TO REMOVE: T45 BIT
 - UNIT IS CHARGED WITH INHIBITOR AT THE MANUFACTURER AND SHIPPED IN A SEALED CONTAINER TO PREVENT DIRT/DUST CONTAMINATION. ALTERNATE and/or ADDITIONAL INHIBITOR SHALL NOT BE USED.

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APR
	B	WEIGHT OF ALL UNITS UPDATED.	09/11/15	CRT
	A	INITIAL RELEASE	07/01/15	

THIRD ANGLE PROJECTION	MATERIAL:	<i>Classic Connectors Inc.</i> Clinton, Ohio
	HEAT TREAT:	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		TITLE
CLASSIC CONNECTOR INC. RESERVES THE RIGHT TO MAKE PRODUCT IMPROVEMENTS AND CHANGES WITHOUT NOTICE. CONSULT FACTORY FOR CURRENT DESIGN		CSR-1631-CD CLAMPSTAR CUSTOMER DRAWING
APPROVALS		SIZE DWG. NO.
DRAWN BY: RLW	DATE: 07/01/15	B CSR-1631-CD
CHECKED BY: SS	DATE: 07/02/15	REV. B
ENGINEER APR.: INI	DATE: XX/XX/XX	SCALE: NONE
		WEIGHT (LBS.)
		WEIGHT
		SHEET: 1 OF 1